


Technical Data Sheet

G250-2 (L)

» Oil service

G250-2 (L) VE

» Water service

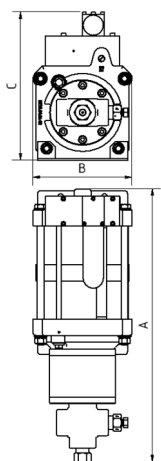

G250-2 (L)

single acting, double air drive head
(Standard= Bottom inlet)

Technical Data:

Air drive pressure:	1 - 10 bar / 14.5 - 145 psi
Calculated working pressure:	4500 bar / 65250 psi
Pressure ratio:	1:530
Displacement volume/double stroke:	3.8 cm³ / 0.23 cu.inch

Connections:

Inlet:	Standard: Bottom Inlet 1/4" BSP
Outlet:	9/16-18UNF
Air drive:	3/4" BSP
Maximum operating temperature:	60°C
Net weight:	22.0 kg

Pressure and flow performances, please see enclosed graph.

Wetted materials of construction:

Seal package:	G250-2(L): Polyurethane G250-2(L)VE: UHMWPE, NBR
---------------	---

Pump Body:	1.4313
------------	--------

Piston:	Hard metal
---------	------------

Fittings:	1.4542
-----------	--------

Approximate Dimensions:

A:	501 mm
B:	181 mm
C:	272 mm

Available Options:

Seal material for oil service:	G250-2 (L)
Seal material for water service:	G250-2(L)VE
Side inlet:	G250-2(L)S/ G250-2(L)VES
Special inlet and outlet ports, i.e. NPT:	G250-2(L)-NPT G250-2(L)VE-NPT

Special seal material to handle special fluids on request.

Available Accessories:

Air control units with filter pressure regulator, control pressure gauge and shut off valve:	G250-2(L) with C2
--	-------------------

To protect the pump against excessive outlet pressures or to limit the outlet pressure, a safety valve can be fitted to the air control unit in the air drive line.	G250-2(L) with C2/SV-air (The required outlet pressure has to be indicated.)
---	--

Please consult factory for more information. All technical and dimensional information subject to change. All General Terms and Conditions of sale, including limitations of our liability, apply to all products and services sold.

Leistungsdiagramm/Performance Graph G 250 -2L

Prüfflüssigkeit/Test Liquid: Wasser-Öl-Emulsion/Water Oil Emulsion ca. 1 - 10 cst

