
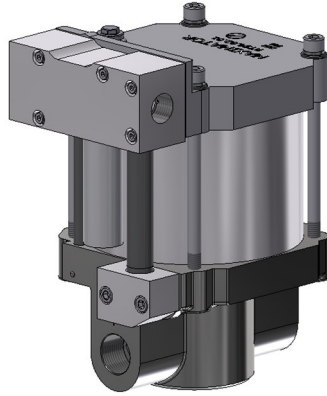


Technical Data Sheet

S100

» Oil service

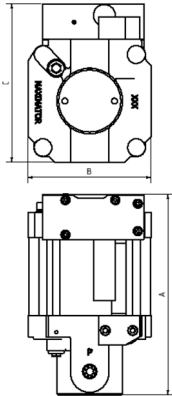

S100

single acting, single air drive head

Technical Data:

Air drive pressure: 1 - 10 bar / 14.5 - 145 psi

Calculated working pressure: 1000 bar / 14500 psi

Pressure ratio: 1:108

Displacement volume/double stroke: 4.5 cm³ / 0.27 cu.inch

Connections:

Inlet: 1/2" BSP

Outlet: 3/8" BSP

Air drive: 1/2" BSP

Maximum operating temperature: 60°C

Net weight: 9.1 kg

Pressure and flow performances, please see enclosed graph.

Wetted materials of construction:

Top cap: 3.4311.01

Air cylinder: 3.3206

Seal package: Polyurethane, NBR

Pump Body: 0.7050

HP Piston: 1.4112

Approximate Dimensions:

A: 220 mm

B: 135 mm

C: 174 mm

Available Options:

Special inlet and outlet ports, i.e. NPT: S100-NPT

Special seal material to handle special fluids on request.

Available Accessories:

Air control units with filter pressure regulator, control pressure gauge and shut off valve: S100 with C1.5

To protect the pump against excessive outlet pressures or to limit the outlet pressure, a safety valve can be fitted to the air control unit in the air drive line. S100 with C1.5/SV-air (The required outlet pressure has to be indicated.)

Please consult factory for more information. All technical and dimensional information subject to change. All General Terms and Conditions of sale, including limitations of our liability, apply to all products and services sold.

Leistungsdigramm/Performance Graph S 100

Prüfflüssigkeit/Test Liquid: Wasser-Öl-Emulsion/Water Oil Emulsion ca. 1 - 10 cst

